

TH-1100CT


- Round Center tower design for operation in tightly planted rows.
- Excellent operator visibility especially in Topping position.
- Swing system allowing the cutting head to be swung in and out of the row while in the topping position.
- Ability to cut over the center of the row.
- The cutting head speed can be adjusted while the machine is in operation.
- Cutting head pitch automatically controlled.
- Large comfortable operator cab.
- Sealed or air conditioned cab optional.
- Economical to run with outstanding performance.



Specifications:

- Cutting path11'3" (343 cm)
- Max. Hedging position height30'6" (930 cm)
- Max. flat Topping height18'5" (560 cm)
- Reach from center-flat Topping (right side).....13'3" (404 cm)
- Reach from center-flat Topping (left side).....1'8" (50 cm)
- Cutting head swing - stroke.....3'8" (110 cm)
- Transport - height- 10'1" (308 cm) - (cutting star folded)
width- 7'6" (230 cm) length- 25' (762 cm)
weight-18,400Lbs. (8350 kg)

100 H.P. HEAVY DUTY POWER UNIT

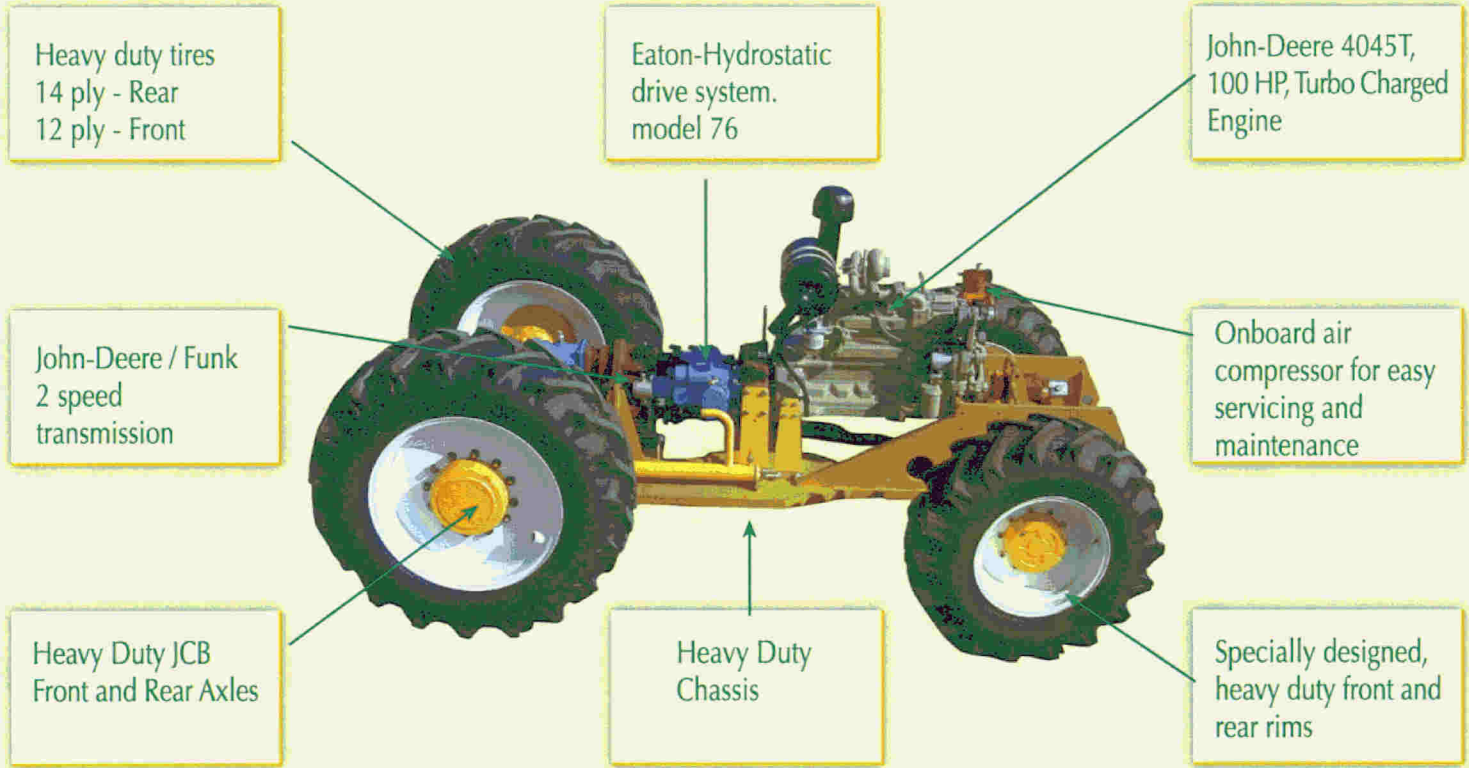

PHOTOGRAPH AND PRODUCT DISCLAIMER :
The machines pictured in this brochure are intended to illustrate general appearance and features of these products. They are equipped as specified by a particular customer and may or may not show items that are optional or recommended. We reserve the right to discontinue models or options at any time or to change specifications and materials, equipment and design without notice and without incurring obligation.